
## NOTES:

- RECOMMENDED MINIMUM 18" CLEARANCE ALL AROUND SPA, UNLESS OTHERWISE SPECIFIED.
- (2) SYMBOL SHOWS 8 OPTIONAL INTERIOR PERIMETER LIGHT LOCATIONS.
- 3. IF EQUIPPED, OZONATOR IS LOCATED BEHIND PANEL ON THE PUMP/PACK SIDE. 4. DRAIN VALVE LOCATED BEHIND PANEL ON THE PUMP/PACK SIDE
- 5. SEE OWNERS MANUAL FOR COMPLETE LOCATING, ELECTRICAL AND SAFETY INSTRUCTIONS.
- 6. LOAD: 160 PSF
- \*COVER LIFTER AND STEP ARE PART OF SUITE PACKAGE.

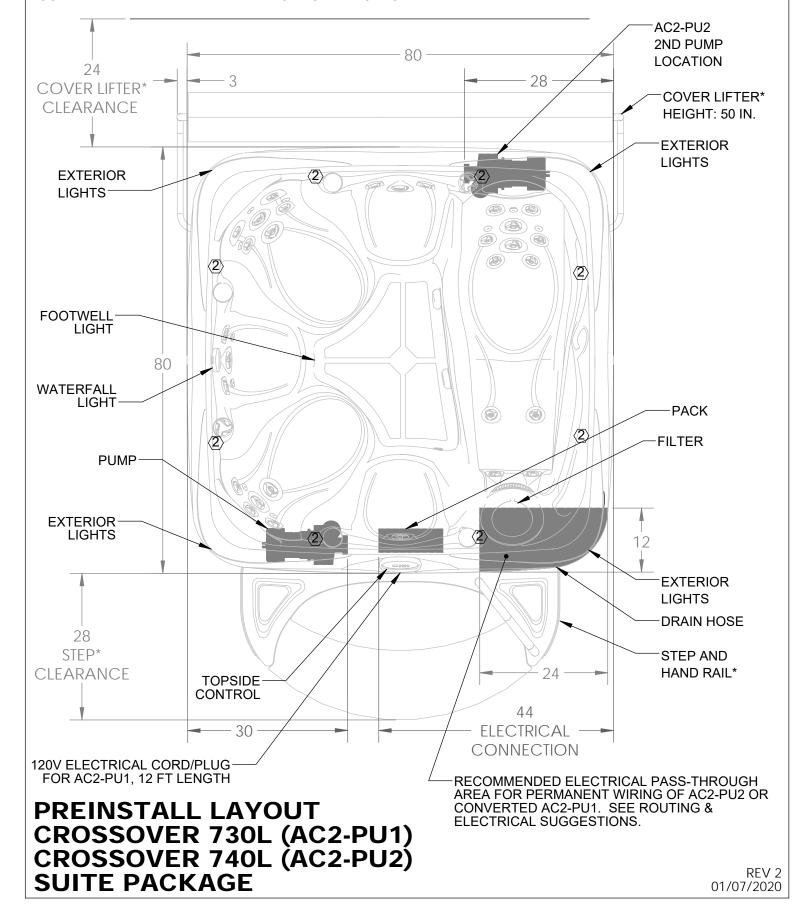

## NOTES:

- RECOMMENDED MINIMUM 18" CLEARANCE ALL AROUND SPA, UNLESS OTHERWISE SPECIFIED.
- 2. (2) SYMBOL SHOWS 8 OPTIONAL INTERIOR PERIMETER LIGHT LOCATIONS.
- IF EQUIPPED, OZONATOR IS LOCATED BEHIND PANEL ON THE PUMP/PACK SIDE.
- 4. DRAIN VALVE LOCATED BEHIND PANEL ON THE PUMP/PACK SIDE
- 5. SEE OWNERS MANUAL FOR COMPLETE LOCATING, ELECTRICAL AND SAFETY INSTRUCTIONS.
- 6. LOAD: 160 PSF

\*COVER LIFTER AND STEP ARE PART OF SUITE PACKAGE.

